



# Nestify

[Info@nestify.ps](mailto:Info@nestify.ps)

Panel Selections:



1 gang light



2 gang light



3 gang light



4 gang light



3 gang Shutter



4 gang Shutter



3 gang dimmer




1 gang 30A boiler

Color Selections:




Product Size:

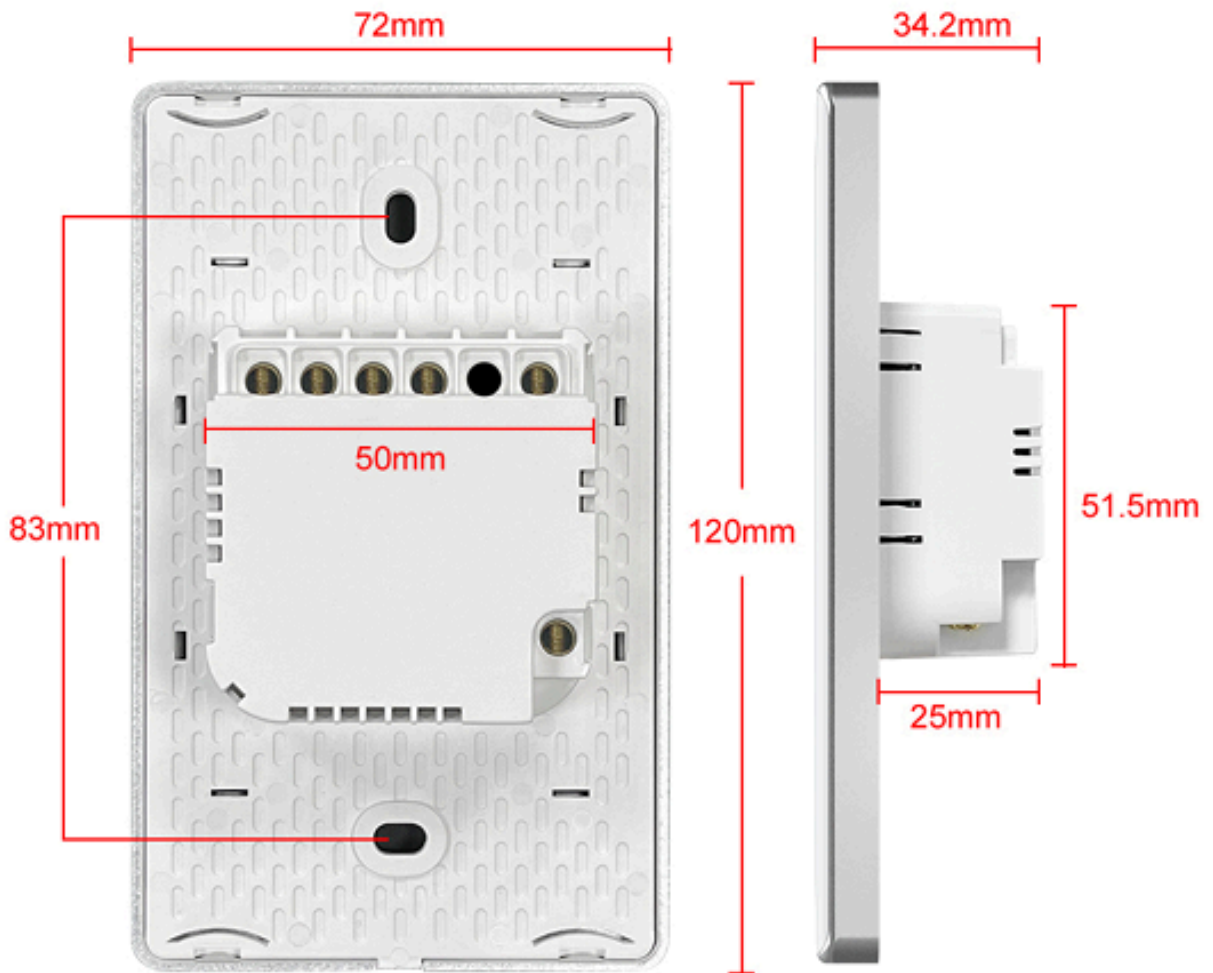

Nestify

## Wiring Diagram For Light Panel

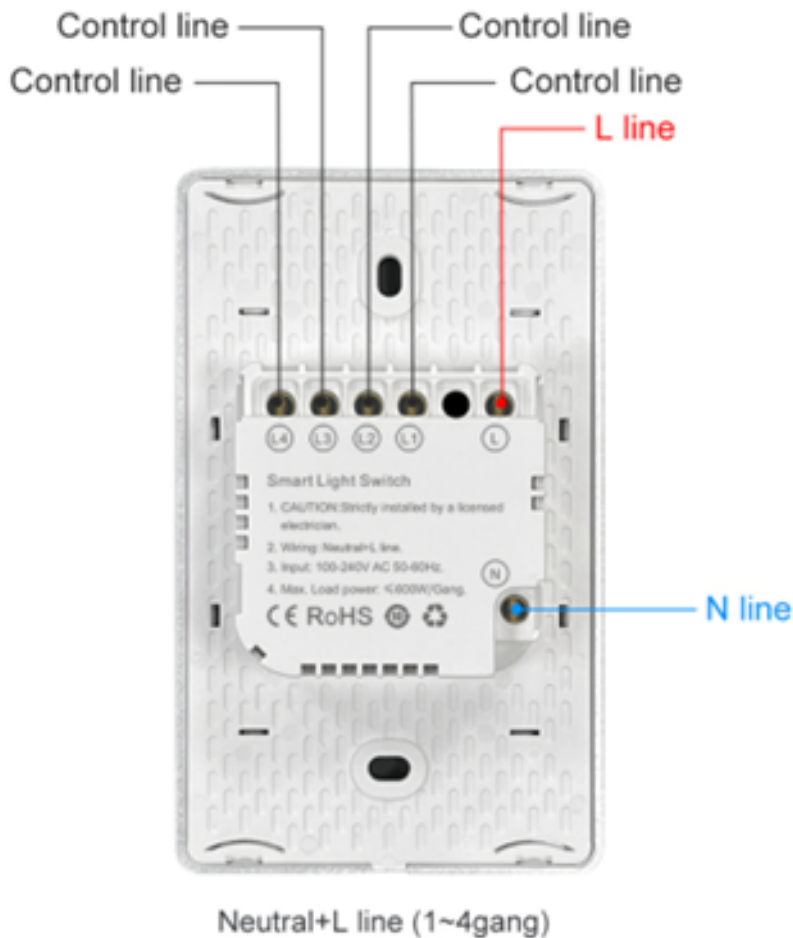

## Product parameters

Product name: Smart Lighting Switch

Standard: US Standard

Wiring: Neutral+L line or Single L line

Control buttons: 1~4 gang

Communication protocol: Wi-Fi or Zigbee

Input voltage: 100-240V AC 50 / 60HZ

Load power: Neutral+L line( $\leq 600/\text{gang}$ )

Single L line: 5-500W/gang ( INC ), 5-150W/gang ( CFL ), 5-150W/gang ( LED )

Control mode: AI Voice / Mobile APP / Manual Button Control

Working humidity:  $\leq 80\%$

Working temperature: 0 ~ 40 °C


Panel material: Curved tempered glass+Aluminum alloy frame

Shell material: PC flame retardant material

Product size: 120\*72\*34mm


APP: Smart Life, Tuya Smart

## Wiring Diagram For Shutter Panel

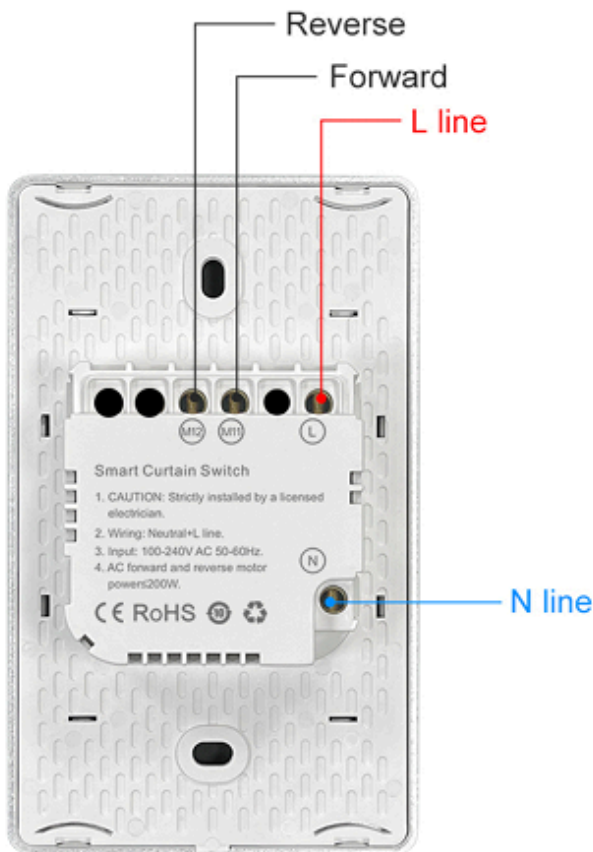

3 gang

(Connected to 1 curtain motor)

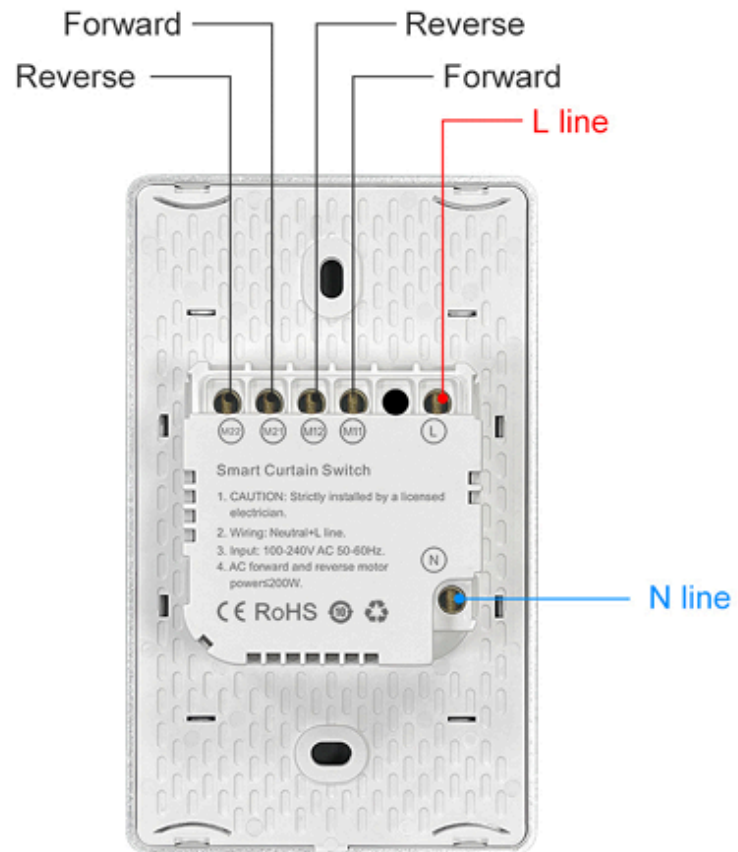


4 gang

(Connected to 2 curtain motor)

## Product parameters

Product name: Smart Curtain Switch	Standard: US Standard
Wiring: Neutral+L line	Control buttons: 3 gang, 4 gang
Communication protocol: Wi-Fi or Zigbee	Input voltage: 100-240V AC 50 / 60HZ
Load power: AC positive and reverse rotation motor power $\leq$ 200W	
Control mode: AI Voice / Mobile APP / Manual Button Control	
Working humidity: $\leq$ 80%	Working temperature: 0 ~ 40 °C
Panel material: Curved tempered glass+Aluminum alloy frame	
Shell material: PC flame retardant material	Product size: 120*72*34mm
APP: Smart Life, Tuya Smart	

## Wiring Diagram For Boiler Panel

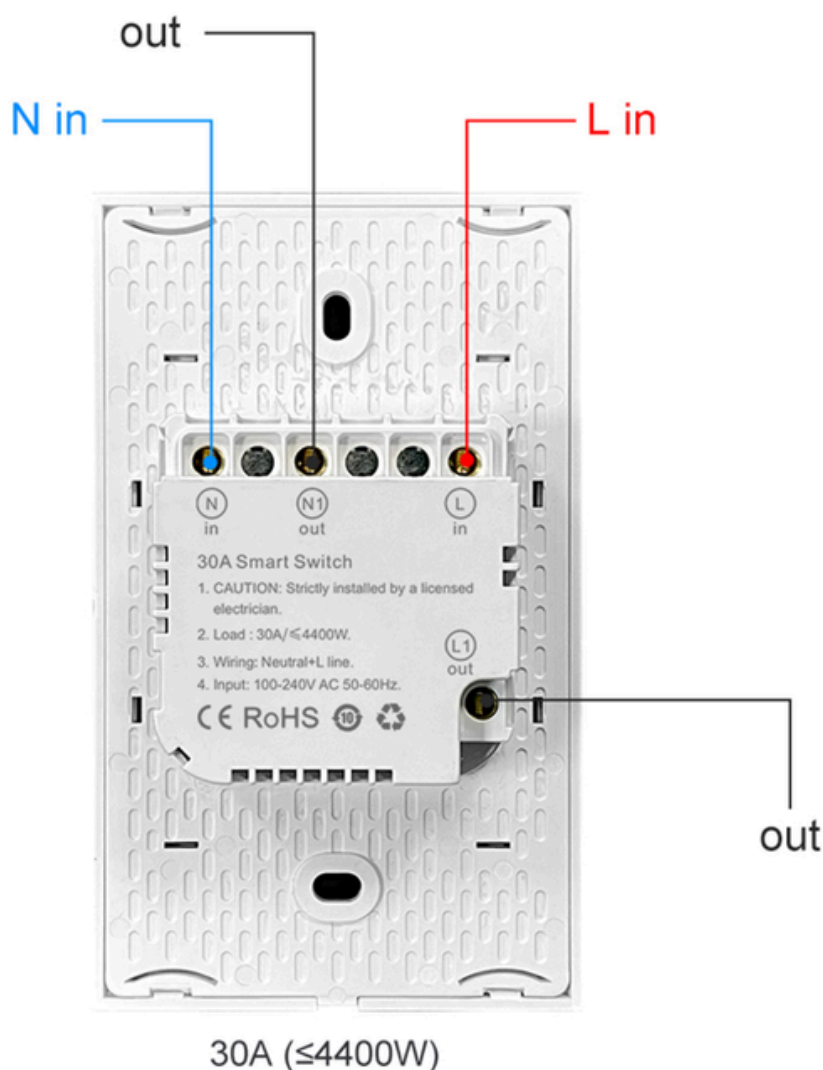

## Product parameters

Product name: Smart 30A Switch

Standard: US Standard

Wiring: Neutral+L line

Control buttons: 1 gang

Communication protocol: Wi-Fi or Zigbee

Input voltage: 100-240V AC 50 / 60HZ

Load power: 30A(≤4400W)

Control mode: AI Voice / Mobile APP / Manual Button Control

Working humidity: ≤80%

Working temperature: 0 ~ 40 °C

Panel material: Tempered glass

Product size: 120\*72\*33.5mm

Shell material: PC flame retardant material

APP: Smart Life, Tuya Smart